Product features

Low VSWR, high cost-effectiveness.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	6	GHz
IL		0.15		dB
VSWR			1.25	

Other parameters

Impedance	50Ω
Connector	BNC-J & SMA-J
Surface	Passivation of stainless steel
Product shell material	Stainless steel SUS303F
Inner conductor	Beryllium Copper Gold Plated
Spanning	PTFE
Work Temp.	-45~+85°C Design assurance
Other	/

Reference picture

Configuration(mm)

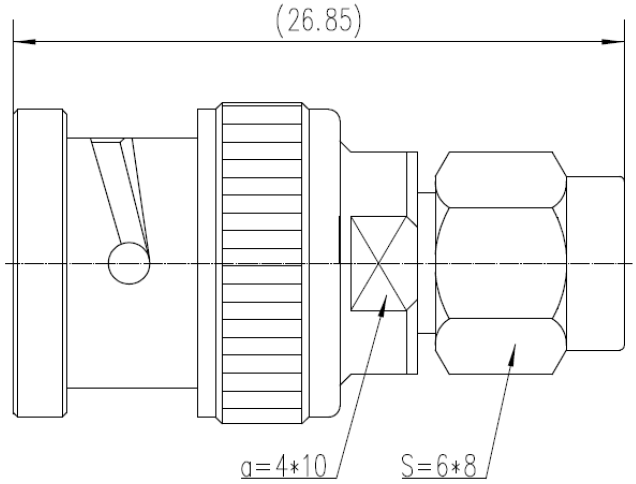

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.