


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	26.4	~	31.6	GHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	DC-24	GHz $\geq$	80			dB
Rejection	35-40	GHz $\geq$	50			dB
Passband VSWR	/	/			1.8	

Other parameters

Connector	2.92-MF or JK
Connector material	Stainless steel
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

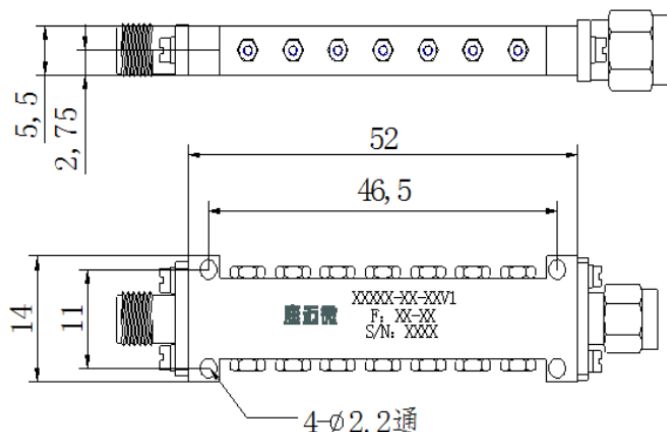

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

