


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	DC	~	450	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			1.5	dB
Rejection	1150-1700	MHz $\geq$	90			dB
Rejection	550-1150	MHz $\geq$	55			dB
Rejection	1700-3000	MHz $\geq$	55			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	N -MF or JK
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade
Other	IP65 design guarantee

Functional diagram

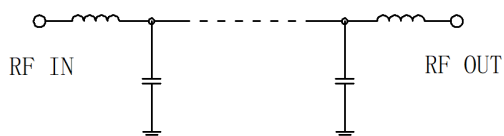

Configuration(mm)

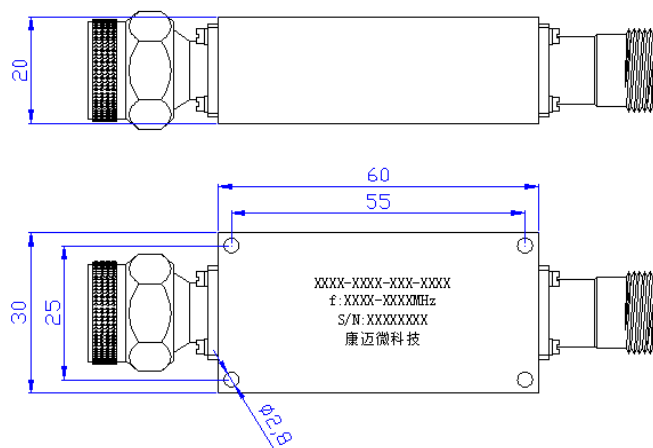

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.