

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1710	~	1960	MHz
Passband IL	/				0.8	dB
Ripple	/	/			0.5	dB
Rejection	DC-1.6	GHz $\geq$	70			dB
Rejection	2.05-2.1	GHz $\geq$	70			dB
Return loss	/	/	20			dB


Other parameters

Connector	N-F
Connector material	Stainless steel
Impedance	50 Ω
Surface	silver-plate
Average input power	200W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-50~+85°C Design assurance


Reference picture



Configuration(mm)

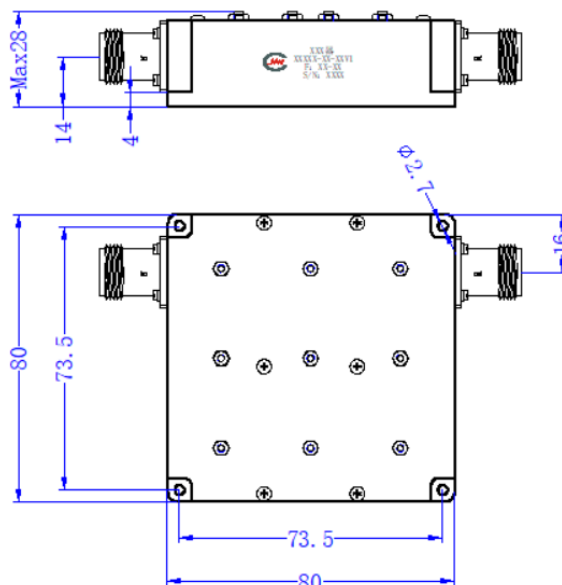

Typical test curve

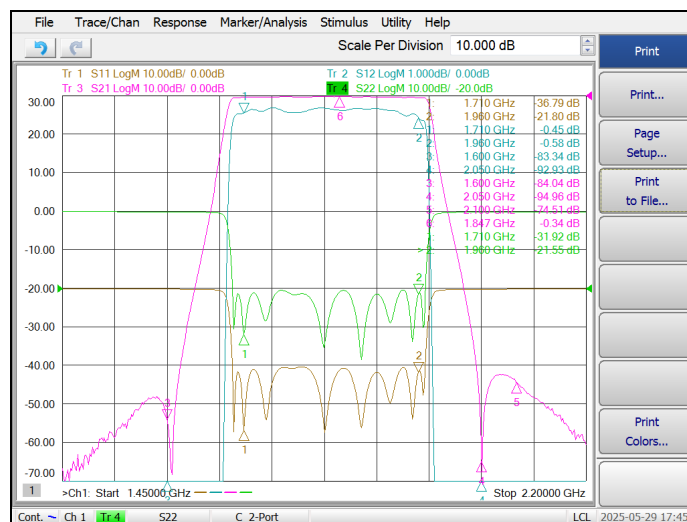

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	/