


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2200	~	2302	MHz
Passband IL	/	/			1	dB
Ripple	± 0.2 dBP-P	(102MHz 带宽内)				dB
Ripple	± 0.1 dB	(任意 ± 9 MHz 带宽内)				dB
Rejection	DC-2120	MHz $\geq$	40			dB
Rejection	2.4-2.6	GHz $\geq$	14			dB
Passband VSWR	/	/			1.35	

Configuration(mm)

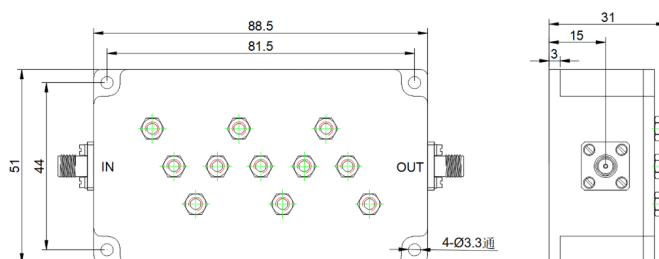

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	Conductive oxidation
Power Capacity	10W Design assurance
Delay ripple	全带宽内 (102MHz) 群时延波动 $\leq$ 2ns; 带内 (± 450 KHz) 群时延变化 $\leq$ 0.7ns; 24h绝对时延变化 $\leq$ 0.7ns
Operation Temp.	-40~+70°C Design assurance