


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	7.7	~	8.3	GHz
Passband IL	/	/			2.0	dB
Ripple	/	/			1.0	dB
Rejection	$F_0 \pm 1.4$	GHz $\geq$	75			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Bandwidth	-1dB $\geq 600\text{MHz}$
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

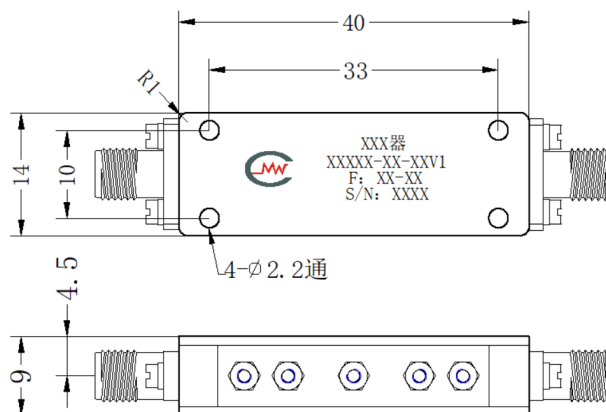

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.