


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5530	~	5770	MHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	DC-4.33	GHz $\geq$	70			dBc
Rejection	4.33-5	GHz $\geq$	60			dBc
Rejection	6.3-6.97	GHz $\geq$	60			dBc
Rejection	6.97-17	GHz $\geq$	70			dBc
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.5mm
Surface	Silver plating
Power	5W Design assurance
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

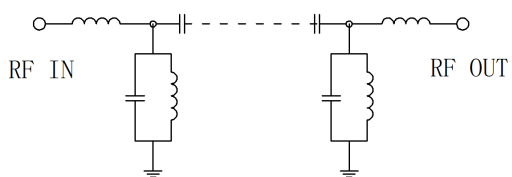

Configuration(mm)

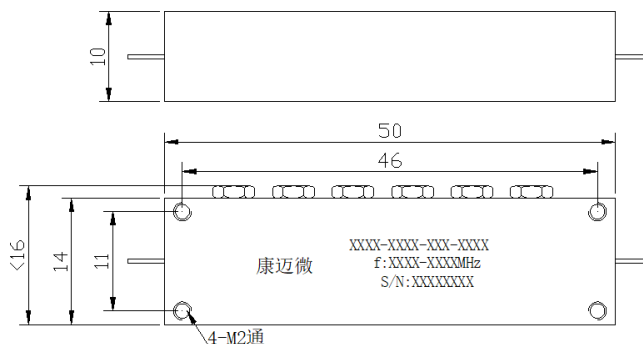

Typical test curve

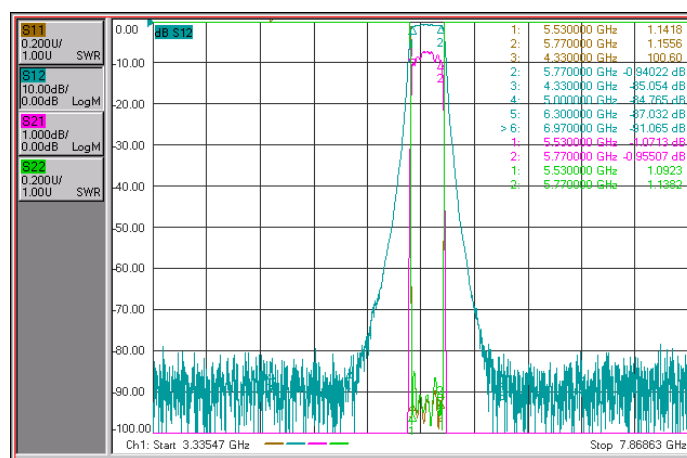

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- If the temperature is higher than 125°C, consult with us before ordering.