


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	8.8	~	8.8	GHz
Passband IL	/	/			6.5	dB
Rejection	DC-8.7	GHz $\geq$	85			dBc
Rejection	8.9-15	GHz $\geq$	85			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance


Functional diagram

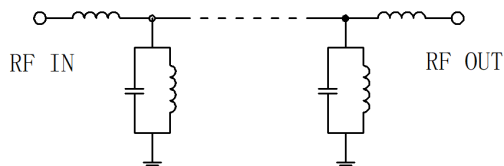

Reference picture



Configuration(mm)

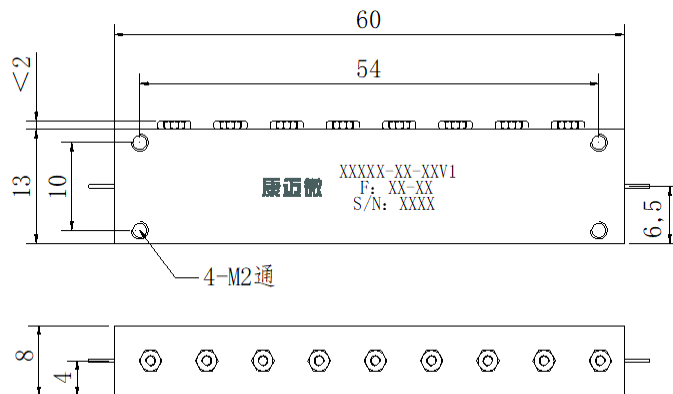

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.