


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	500	~	6000	MHz
IL		8	8.5	dB
Isolation	16	18		dB
Input VSWR		1.50	1.60	
Output VSWR		1.40	1.50	
Amplitude balance		0.6	1	dB
Phase balance		5	8	°

Other parameters

Power Capacity	15W Design assurance
X-Way	4-way
Connector	SMA-K
Surface	Black baking paint
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

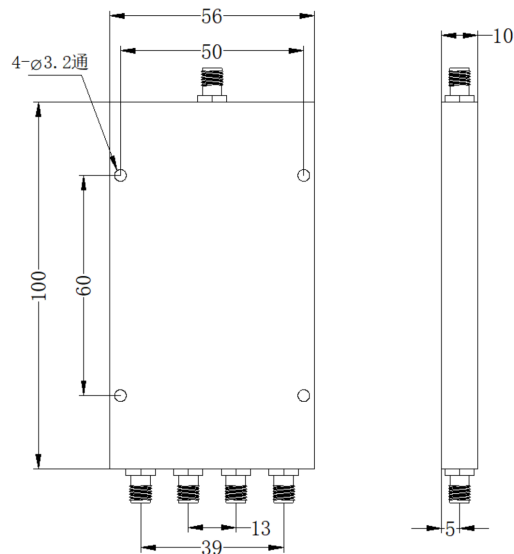

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.