


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	200	~	2000	MHz
Clipping level			12.5	dBm
IL			0.5	dB
VSWR			1.3	


Other parameters

Power Capacity	10W Design assurance
Impedance	50Ω
Connector	Microstrip pad
Operation Temp.	-45~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Other	功率容量: 连续波10W工作10分钟 峰值功率200W占空比5%脉宽125us


Reference picture



Configuration(mm)

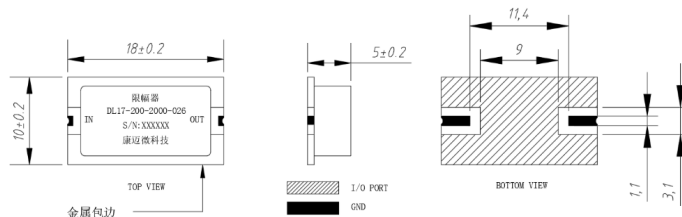

Typical test curve

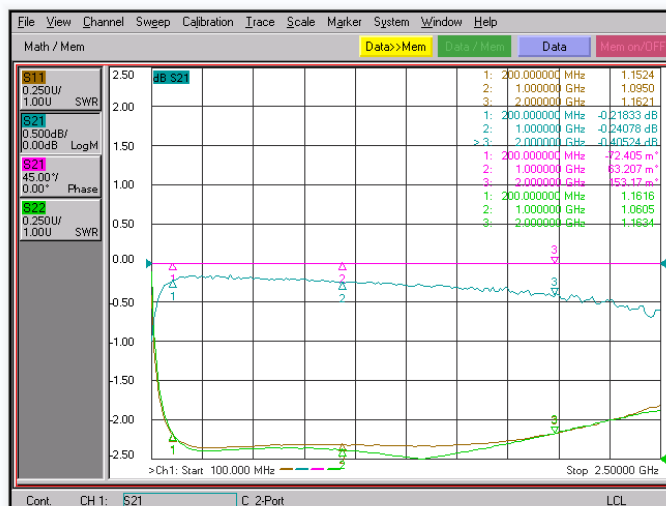

Note

1, Pay attention to the direction of input and output, reverse connection may cause the product to burn out.