


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	18 80	~	19 20	MH z
Passband IL	/	/			2	dB
Rejection	DC- 1870	MHz ≥	50			dB
Rejection	1930- 4000	MHz ≥	50			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	N -F
Impedance	50Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-20~+60°C Design assurance

Configuration(mm)

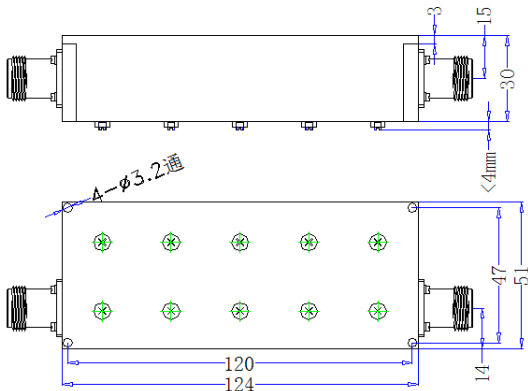

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.