

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	13	~	14	MHz
IL		0.05		dB
Coupling	59	60	61	dB
Directivity	30			dB
Main line VSWR			1.1	
Coupled line VSWR			1.4	


Other parameters

Connector	N-F, coupling port SMA-F
Connector material	Stainless steel
Impedance	50Ω
Surface	White
Power Capacity	3000W Design assurance
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade

Port Definition

Input port	IN	N-F
Output port	OUT	N-F
Coupling port	C1	SMA-F
Isolated Port	C2	SMA-F

Configuration(mm)

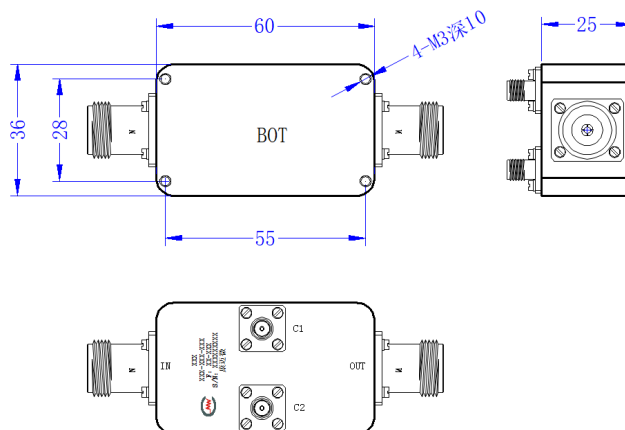

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.