


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	1.1	~	1.3	GHz
Passband F2	/	/	1.5	~	1.61	GHz
band 1 IL	/	/			1	dB
band 2 IL	/	/			1	dB
Passband VSWR	/	/			1.5	
Band 1 Rejection	1.5-1.61	GHz ≥	60			dB
band 2 Rejection	1.1-1.3	GHz ≥	60			dB

Other parameters

Connector	N -F
Surface	silver-plate
Power Capacity	40W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

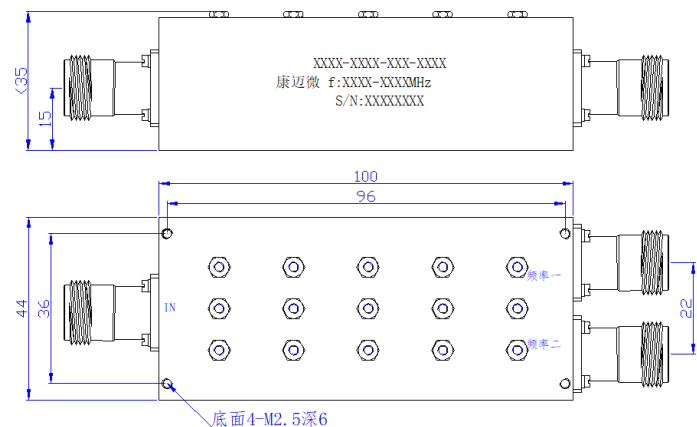

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 1 If the temperature is higher than 125°C, consult with us before ordering.