


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	20 20	~	21 20	MHz
Passband IL	/	/			0.5	dB
Ripple	/	/			0.3	dB
Rejection	DC-1.8	GHz $\geq$	55			dBc
Rejection	2.2-2.3	GHz $\geq$	80			dBc
Rejection	4-4.4	GHz $\geq$	40			dBc
Rejection	6-6.6	GHz $\geq$	35			dBc
Passband VSWR	/	/			1.3 5	


Other parameters

Connector	N-F
Impedance	50 Ω
Surface	silver-plate
Power Capacity	500W Design assurance
Delay ripple	$\leq$ 8ns@any 40MHz
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

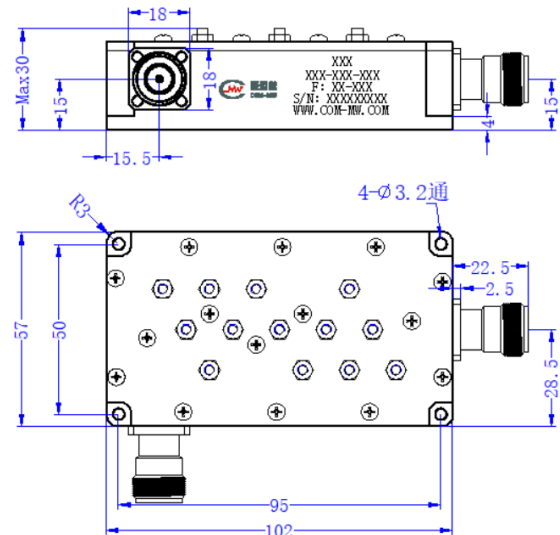

Typical test curve

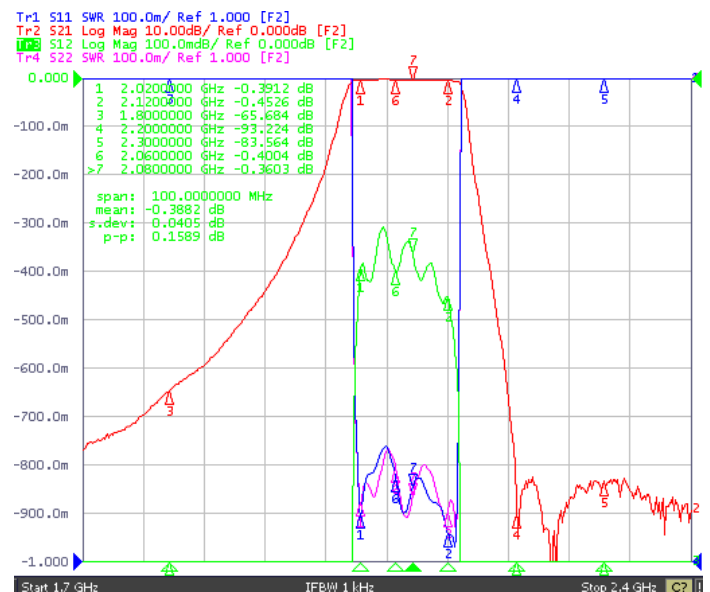

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	/