


Main specifications

Parameters	Freq uenc y	/	Mi n	Typ ical	M ax	Un its
Passband	/	/	30 .5	~	40	GH z
Passband IL	/	/			3	dB
Rejection	DC- 27.5		50			dB
Passband VSWR	/	/			2	

Other parameters

Connector	2.92-F
Connector material	Stainless steel
Impedance	50Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance


Functional diagram

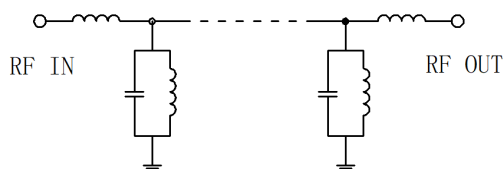

Reference picture



Configuration(mm)

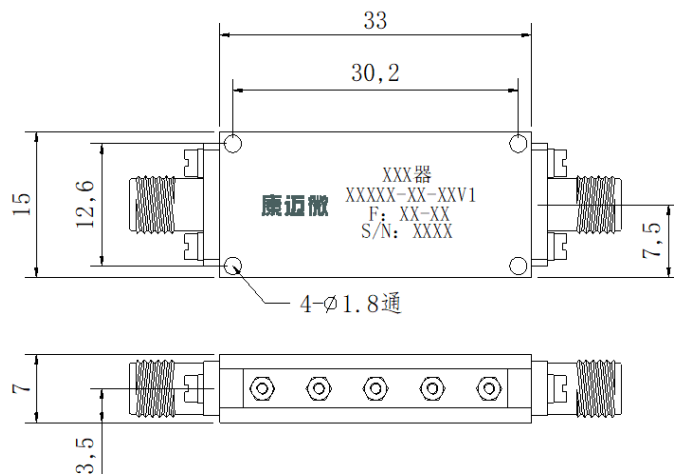

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.