


Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband			DC	~	1410	MHz
Passband IL					0.4	dB
Ripple					0.4	dB
Rejection	2000-2200	MHz $\geq$	20			dB
Rejection	2200-4000	MHz $\geq$	40			dB
Passband VSWR					1.3	

Other parameters

Connector	Microstrip pad
Impedance	50 Ω
Power Capacity	10W
Operation Temp.	-40~+85°C

Configuration(mm)

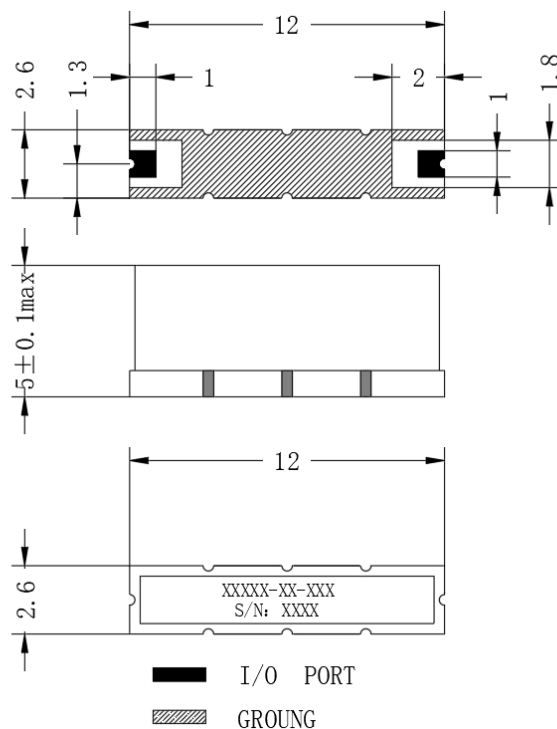

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	Good grounding, please keep the installation surface flat.