

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2	~	18	GHz
Gain		10		dBi
VSWR		2		
Isolation		10		dB
AR		3		dB
power	20			W


Other parameters

Polarization	Dual Circular Polarization
Connector	SMA-K
Outline size	118*118*258mm
Estimated weight	1.5Kg
Surface	Gray
Operation Temp.	-25~+45°C Design assurance



Configuration(mm)

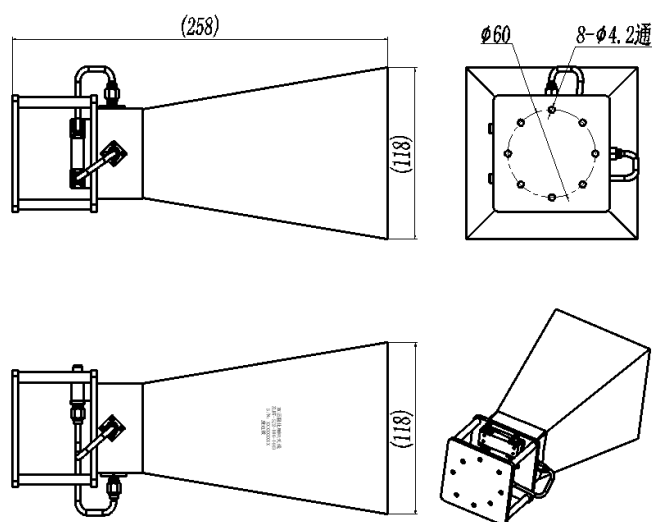

Reference picture



Typical test curve

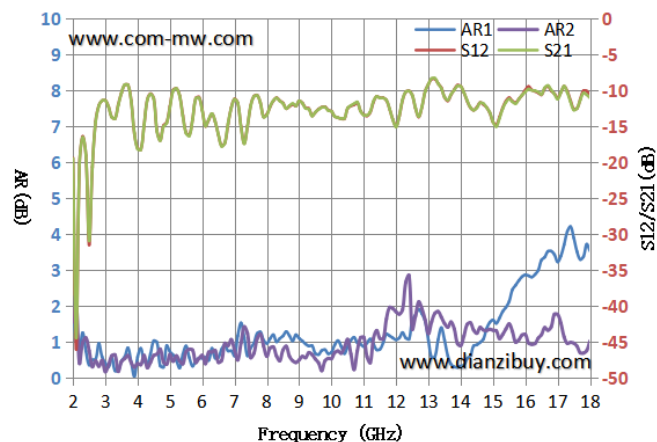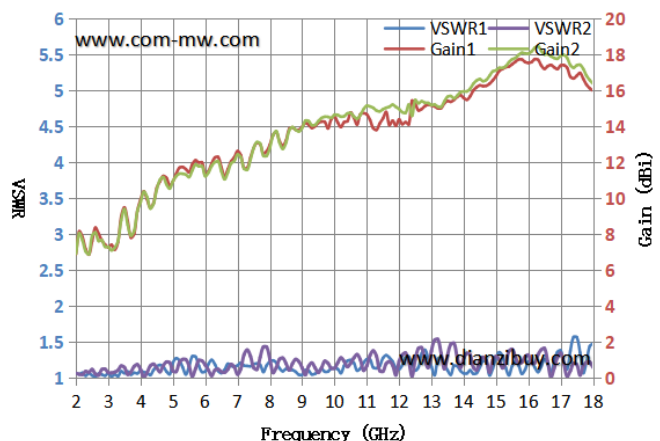

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

Avoid collisions during installation.

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.