


Main specifications

Items	Frequency (G)	Min	Type	Max	Units
Frequency		DC	~	67	GHz
VSWR			---	1.35	

Other parameters

Cable category	LL Phase Stable
Length	2000mm
Connector 1	1.85-M or J
Connector 2	1.85-F or K
Armor categories	weave armor
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-40~+85°C Design assurance


Configuration



Overall dimensions (mm)

A	2000	mm
B	6.3	mm
T	20	mm


Type power curve

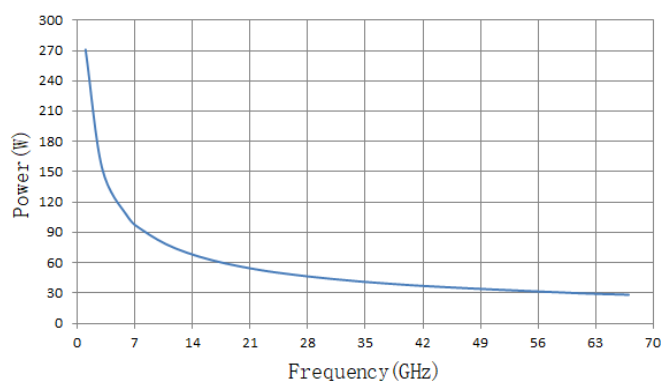

Reference picture



Cable structure diagram

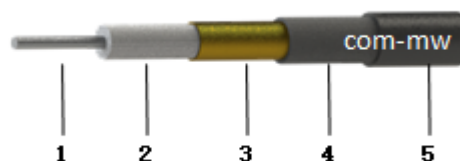

Note

Static turning radius	32mm
Dynamic conversion to radius	63mm