

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	10500	~	11500	MHz
Passband IL	/	/			3	dB
Ripple	/	/			1	dB
Rejection	DC-10	GHz $\geq$	35			dB
Rejection	12	GHz $\geq$	35			dB
Passband VSWR	/	/			1.6	


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance

Reference picture



Configuration(mm)

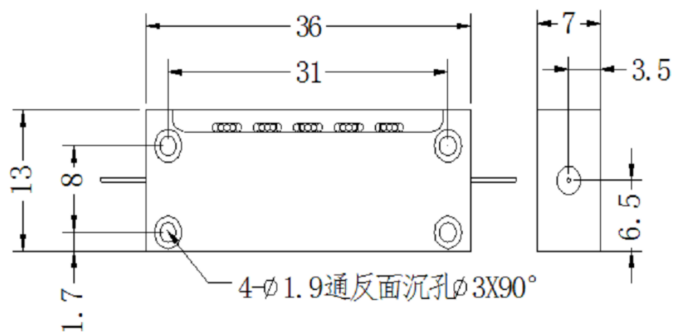

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 It is prohibited to install embedded filters on microwave multilayer boards with frequencies greater than 2000MHz after opening holes.