


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	6300	~	6800	MHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	5500-6000	MHz $\geq$	60			dB
Rejection	7100-9300	MHz $\geq$	20			dB
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

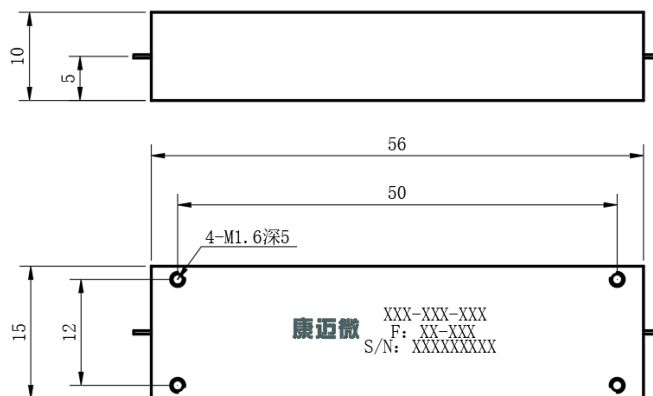

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W
Product shell material	Aluminium
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

