


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	935	~	985	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-0.86	GHz $\geq$	60			dBc
Rejection	0.86-0.91	GHz $\geq$	25			dBc
Rejection	1.01-1.06	GHz $\geq$	25			dBc
Rejection	1.06-3	GHz $\geq$	60			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Bandwidth	-1dB $\geq$ 50MHz
Bandwidth	-3dB $<$ 70MHz
Delay ripple	$\leq$ 15ns@f0 $\pm$ 25MHz
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

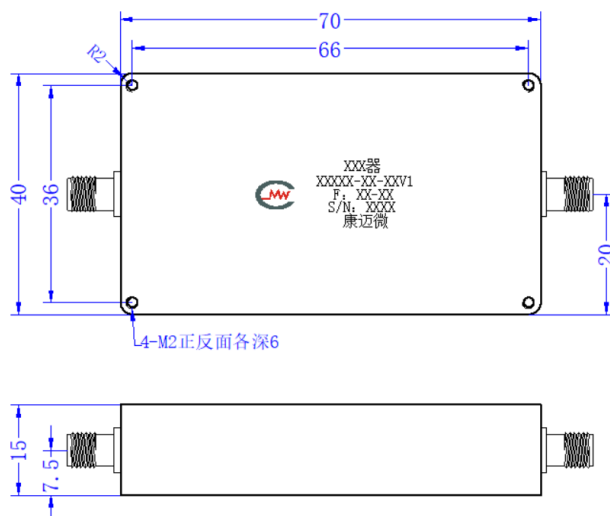

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.