


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1700	~	1920	MHz
Passband IL	/	/			1	dB
Rejection	3400-5800	MHz $\geq$	50			dB
Rejection	DC-800	MHz $\geq$	50			dB
Rejection	2500-5800	MHz $\geq$	50			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

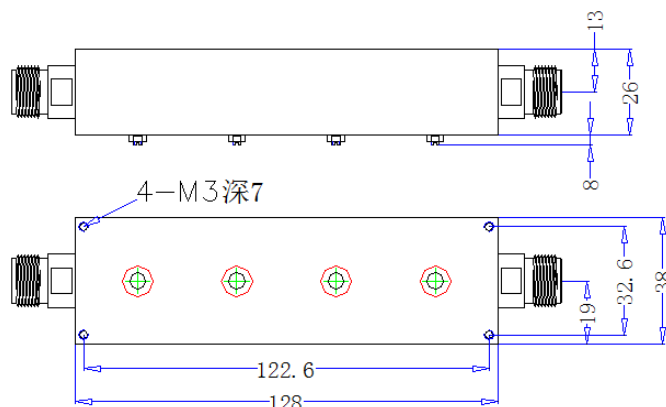

Other parameters

Connector	N -F
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	200W Design assurance
Operation Temp.	-10~+50°C Design assurance