


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	350	~	356	MHz
Passband F2	/	/	360	~	366	MHz
band 1 IL	/	/			1.6	dB
band 2 IL	/	/			1.6	dB
Passband ripple	/	/			0.7	dB
Passband VSWR	/	/			1.5	
Band 1 Rejection	DC-320	MHz $\geq$	60			dB
Band 1 Rejection	360-366	MHz $\geq$	50			dB
band 2 Rejection	350-356	MHz $\geq$	50			dB
band 2 Rejection	400-1000	MHz $\geq$	60			dB
Isolation			50			dB

Configuration(mm)

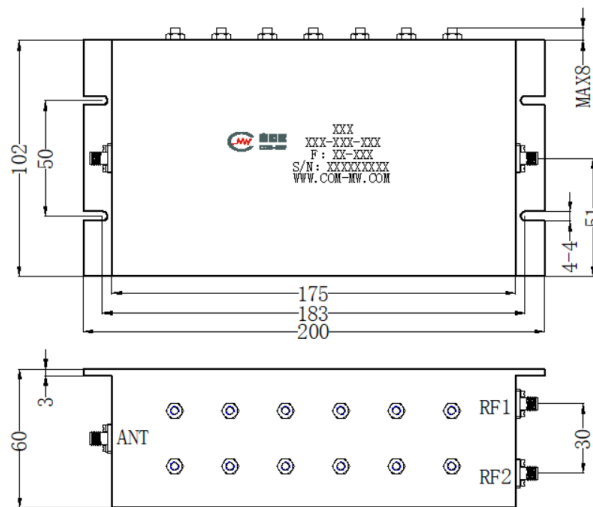

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Conductive oxidation
Power Capacity	50W Design assurance
Operation Temp.	-10~+40°C Design assurance
Storage Temp.	-40~+70°C Design assurance

Port Definition

1	Common port	ANT
2	Passband 1	RF1
3	Passband 2	RF2