

## Product features

High power, Low VSWR.

## Main specifications

| Parameters | Min | Typical | Max | Units |
|------------|-----|---------|-----|-------|
| Frequency  | 6.5 | ~       | 10  | GHz   |
| VSWR       |     |         | 1.2 |       |


## Other parameters

|                        |                               |
|------------------------|-------------------------------|
| Power Capacity         | Peak value 5MW, average 1000W |
| Connector              | Waveguide                     |
| Waveguide port         | BJ84                          |
| Surface                | Conductive oxidation          |
| Product shell material | Aluminium                     |
| Operation Temp.        | -30~+70°C Design assurance    |

## Reference picture



## Configuration(mm)

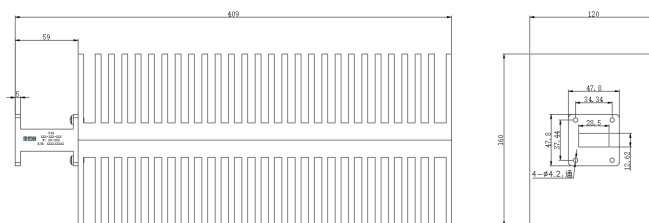

## Note

Heat dissipation space is needed for installing the load, far away from the equipment with large heat output