

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
F1 RX	/	/	5150	~	5300	MHz
F2 TX	/	/	5710	~	5870	MHz
band 1 IL	/	/			0.6	dB
band 2 IL	/	/			0.6	dB
Passband ripple	/	/			0.4	dB
Passband VSWR	/	/			1.5	
Band 1 Rej.	5710~5870	MHz $\geq$			30	dB
Band 2 Rej.	5150~5300	MHz $\geq$			30	dB


Other parameters

Connector	SMA-K detachable, Pin 0.5mm
Surface	silver-plate
Power Capacity	30W Design assurance
Operation Temp.	-45~+85°C Design assurance
Storage Temp.	-45~+85°C Design assurance

Port Definition

1	Common port	ANT
2	Passband 1	RX
3	Passband 2	TX
4	GND Port	---

Configuration(mm)

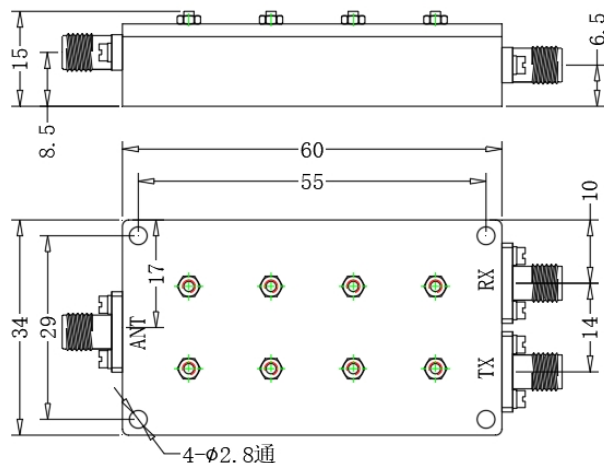

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.