


Main specifications

Parameters	Min	Typical	Max	Units
Frequency		15		GHz
Output power		20		dBm
spur reduction	70			dBc
harmonic	70			dBc


Other parameters

Connector	SMA-K detachable, Pin 0.38mm
Connector material	Stainless steel
Impedance	50Ω
Surface	Conductive oxidation
Working voltage	+12V
Working current	400mA
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade
Other	Set Span to 10KHz, with a frequency accuracy offset of 15KHz and a frequency bandwidth of 0.3KHz

Reference picture



Configuration(mm)

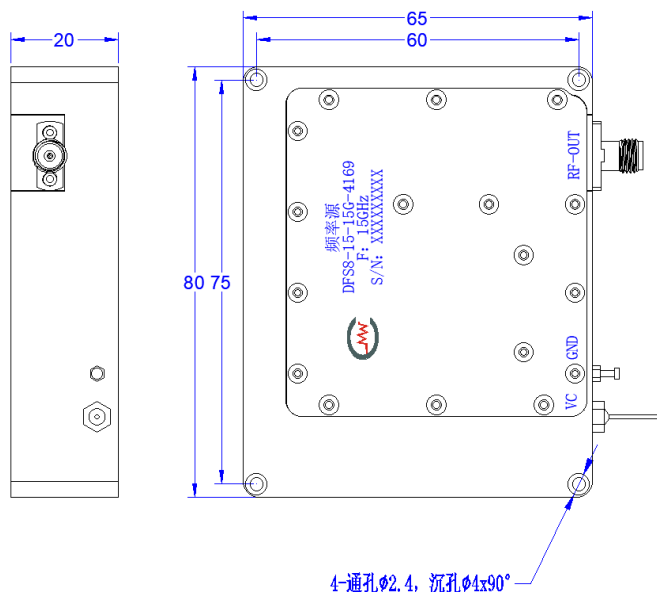

Note

1. Store in an environment with humidity less than 25%, pay attention to dust and static electricity prevention;
- If the overall temperature of the product is greater than 125 °C, please consult with us before placing an order;
3. Clean the surface of the product and do not soak it in cleaning solution for cleaning;