


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	832	~	862	MHz
Passband IL	/	/			2.0	dB
Rejection	DC-807	MHz $\geq$	50			dB
Rejection	862-1800	MHz $\geq$	50			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	Black
Power Capacity	20W Design assurance

Configuration(mm)

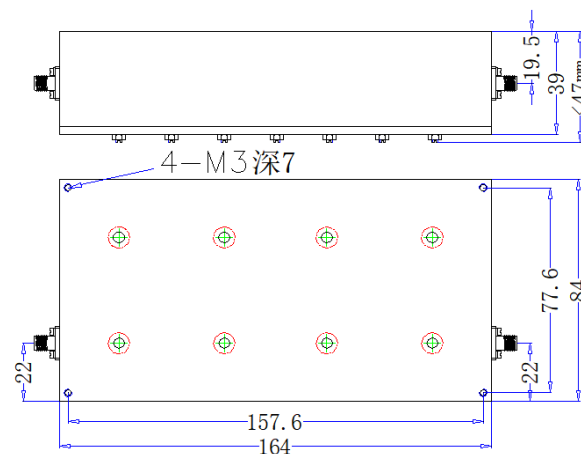

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.