

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	950	~	2150	MHz
IL	2.0dB@2150mhz		13.5dB@950mhz	
Equilibrium quantity			11 (±0.5)	dB
Return loss	10			dB


Other parameters

Power Capacity	5W Design assurance
Impedance	50Ω
Connector	SMA-K
Surface	silver-plate
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-40~+70°C Design assurance

Reference picture



Configuration(mm)

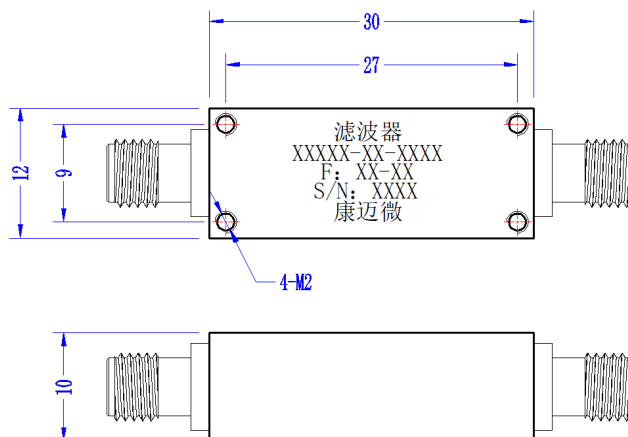

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.