

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	DC	~	10	MHz
Passband F2	/	/	900	~	1500	MHz
band 1 IL	/	/			1	dB
band 2 IL	/	/			2	dB
Flatness in band	/	/			1.0, 通带2波动	dB
Passband VSWR	/	/			1.6	
Band 1 Rejection	20	MHz $\geq$	70			dBc
band 2 Rejection	10	MHz $\geq$	120			dBc
band 2 Rejection	750	MHz $\geq$	40			dBc
band 2 Rejection	1800	MHz $\geq$	40			dBc


Other parameters

Connector	SMA-F or K可拆0.38mm针
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Port Definition

1	Common port	---
2	Passband 1	---
3	Passband 2	---
4	GND Port	---

Configuration(mm)

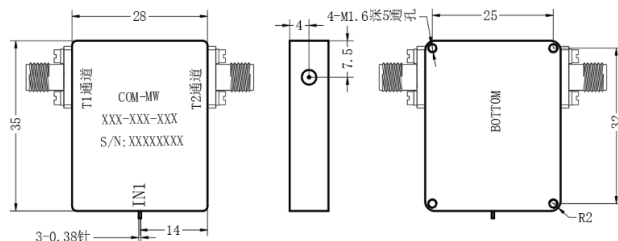

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.