

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	21.7	~	33	GHz
VSWR			1.2	


Other parameters

Power Capacity	50W Design assurance
Connector	Waveguide
Waveguide port	WR34 or BJ260
Waveguide flange	FBP260
Surface	Conductive oxidation
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance

Note

When installing the load, it is necessary to consider sufficient heat dissipation space and not install it next to equipment with high heat output.

Power Derating Curve

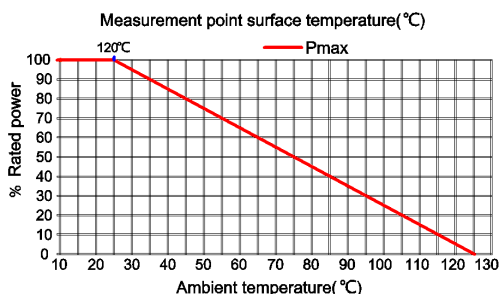

Reference picture



Configuration(mm)

