


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	433	~	435	MHz
Passband IL	/	/			1	dB
Rejection	404	MHz ≥	40			dB
Rejection	464	MHz ≥	40			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Black
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

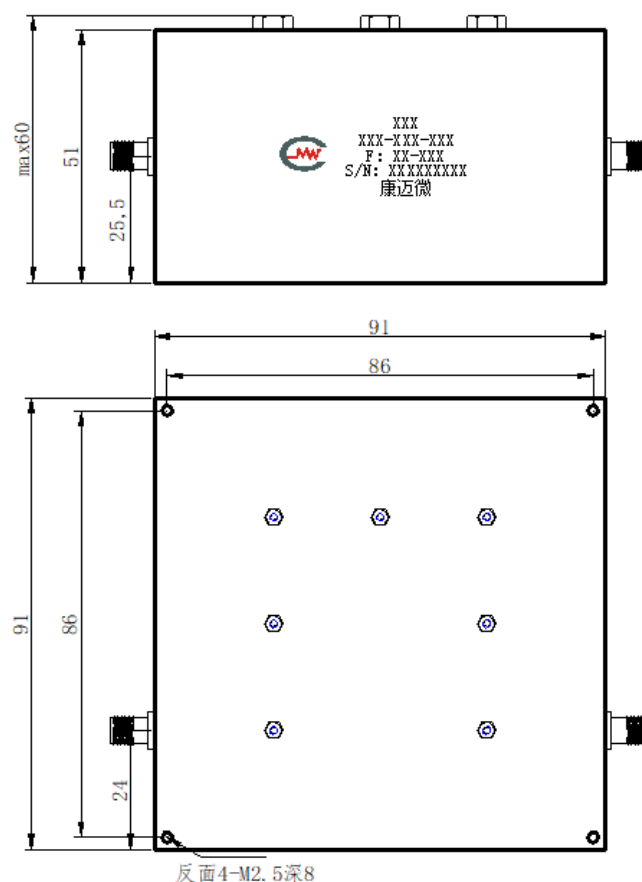

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.