


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	6880.6	~	6900.6	MHz
Passband IL	/	/			6	dB
Ripple	/	/			0.3@峰峰值	dB
Rejection	DC-4.7	GHz $\geq$	75			dB
Rejection	4.7-5.5	GHz $\geq$	65			dB
Rejection	F0 ± 40	MHz $\geq$	60			dB
Rejection	9-15	GHz $\geq$	65			dB
Passband VSWR	/	/			1.4	

Configuration(mm)

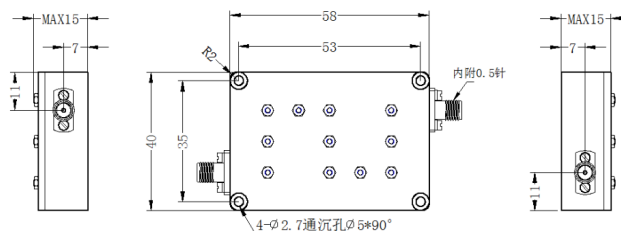

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-K可拆, 微带针 $\varnothing 0.5$
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
1dB BW	± 20.5 MHz ± 0.7 MHz
带内群时延稳定性	≤ 0.2 ns/24h
Operation Temp.	-20~+60°C Design assurance
Storage Temp.	-55~+85°C Design assurance