


Main specifications

Parameters	Freq uenc y	/	Mi n	Typ ical	Ma x	Un its
Passband	/	/	27 60	~	27 75	MH z
Passband IL	/	/			0.8	dB
Rejection	DC~2 690	MH z ≥	70			dB
Rejection	2900- 6000	MH z ≥	70			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-F
Connector material	Housing 304 stainless steel
Impedance	50Ω
Surface	Black baking paint
Power Capacity	20W Design assurance
Operation Temp.	-10~+50°C Design assurance

Configuration(mm)

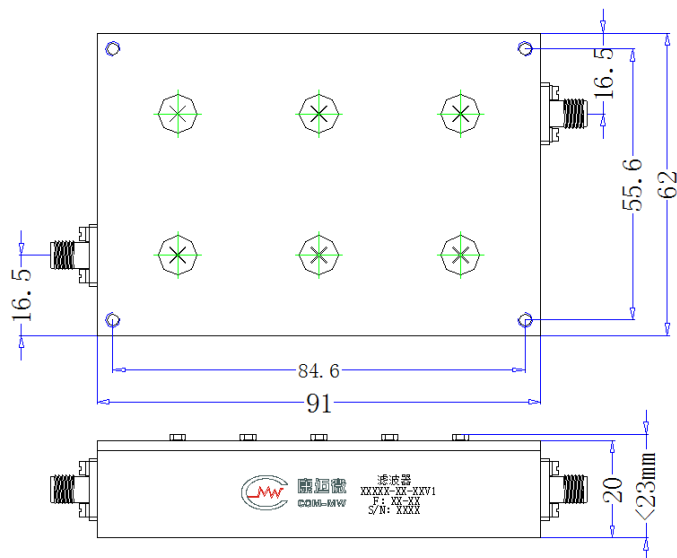

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.