

Product features

For waveguide link calibration

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	8200	~	12500	MHz


Other parameters

Flange model	FBP100
Surface	White
Product shell material	Aluminium
Other	Waveguide 1/4 wavelength line

Reference picture



Configuration(mm)

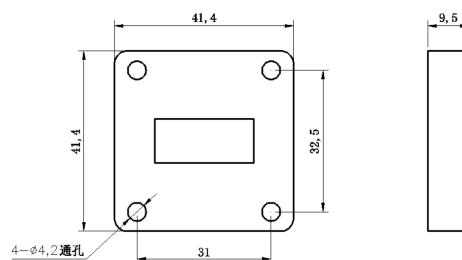

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.