

产品特点

高矩形系数，小体积。

主要参数

参数	频率	/	最小	典型	最大	单位
通带频率	/	/	57.8	~	62.2	MHz
中心损耗	/	/	19.2	23.5	26.9	dB
1dB带宽	/	/	4.3	4.5		MHz
3dB带宽	/	/	4.7	5.1		MHz
40dB带宽	/	/		7.2	7.5	MHz
带外抑制	50					dB


其它参数

接口形式	微带圆针0.5mm针
功率容量	0.1W设计保证
绝对时延	≤2000ns
时延波动	≤40ns
工作温度	-40~+70℃设计保证



典型测试数据

F(MHz)	S21 (us)	S21 (dB)
56.45	0.9583	-63.91
56.75	2.0309	-40.65
57	1.9934	-30.89
57.25	1.9645	-25.03
57.55	1.956	-21.35
57.8	1.9516	-20
58.1	1.9547	-19.4
58.65	1.9557	-19.42
59.2	1.9566	-19.24
59.75	1.9596	-19.31
60.3	1.9629	-19.15
60.85	1.9597	-19.14
61.4	1.9592	-19.28
61.95	1.9491	-19.19
62.5	1.9659	-21.24
62.8	1.974	-25.8
63.05	1.9345	-32.55
63.3	1.8329	-43.15
63.6	1.3942	-68.13



参考实物图



外形结构图 (mm)



典型测试曲线图

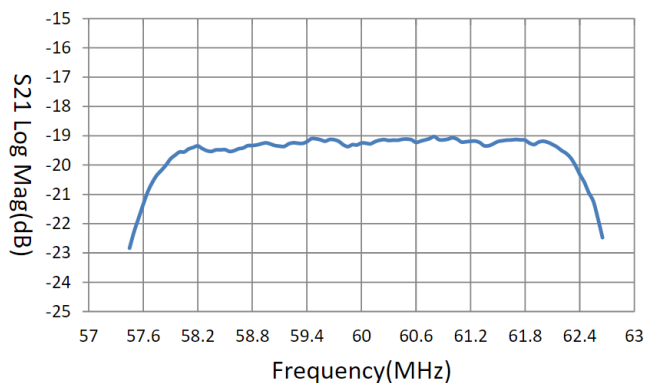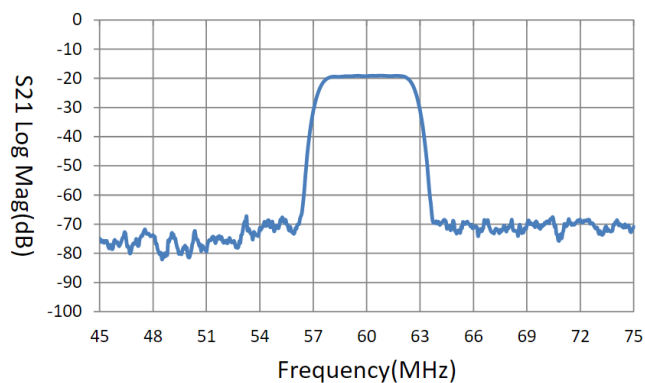

注意事项

- 清洗产品表面，请勿将产品浸泡清洗液中清洗。