


Main specifications

Parameters	Frequ ency	/	Min	Typi cal	Max	Units
Passband	/	/	50	~	150	MHz
Passband IL	/	/			1	dB
Rejection	30	MHz $\geq$	30			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-JK
Impedance	50 Ω
Surface	silver-plate
Operation Temp.	-40~+70°C

Configuration(mm)

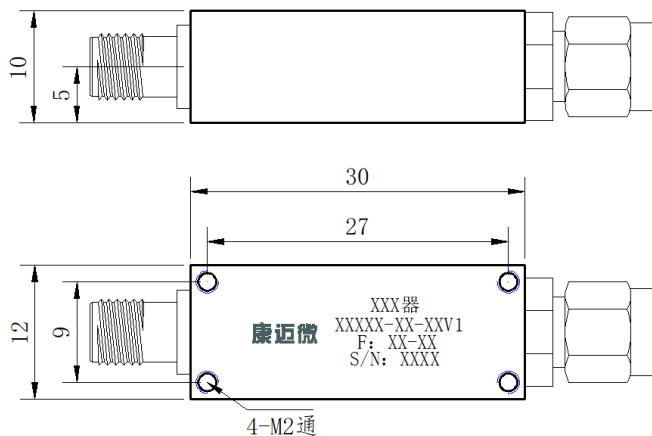

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.