

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	5	~	8	GHz
Gain		10		dBi
VSWR		1.35		
power		100		W

Other parameters

Polarization	Linear polarization
Connector	SMA-K
Outline size	93*56*65mm
Estimated weight	80g
surface treatment	Conductive oxidation
Operation Temp.	-25~+45°C Design assurance
Storage Temp.	-45~+75°C Design assurance

Configuration(mm)

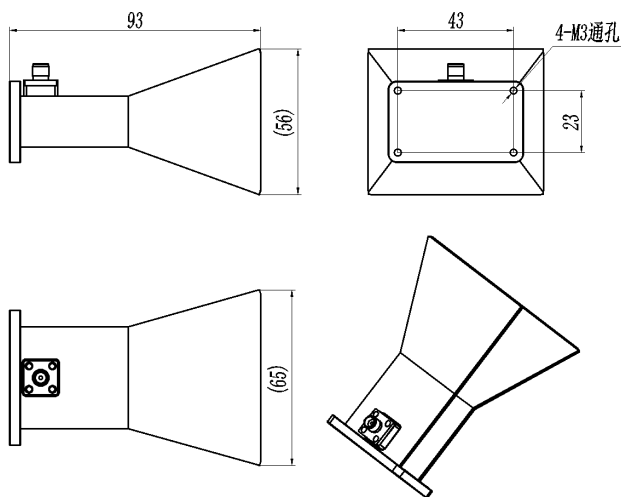

Reference picture



Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.