


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	16.2	~	18	GHz
Passband IL	/	/			3.0	dB
Ripple	/	/			1.0	dB
Rejection	DC-15.1	GHz $\geq$	70			dBc
Rejection	18.75-21	GHz $\geq$	35			dBc
Rejection	21-30	GHz $\geq$	65			dBc
Passband VSWR	/	/			1.50	
Return loss	/	/				dB

Reference picture




Configuration(mm)

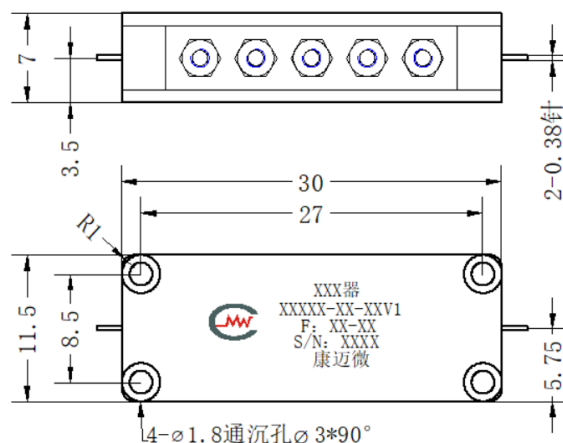

Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Typical test curve

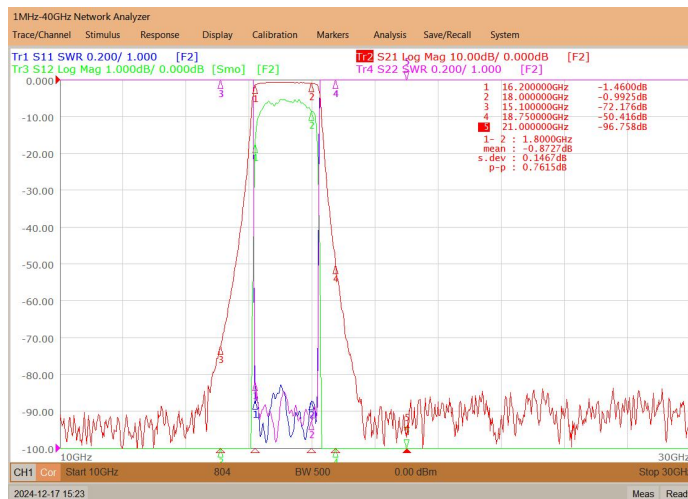

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.