


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	250	~	300	MHz
Passband IL	/	/			3	dB
Ripple	/	/			1.2	dB
Rejection	DC-200	MHz $\geq$	50			dBc
Rejection	350-500	MHz $\geq$	60			dBc
Passband VSWR	/	/			1.5	

Reference picture




Configuration(mm)

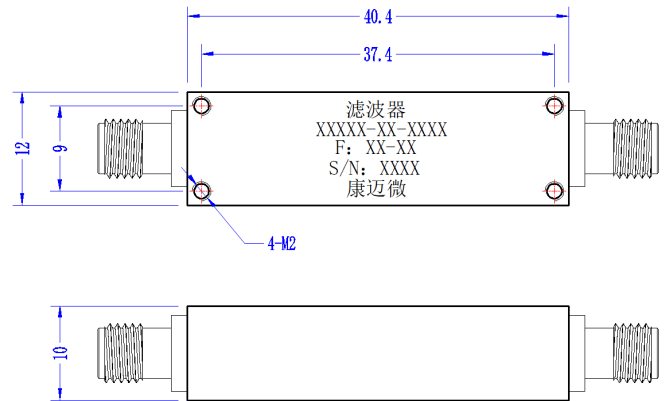


Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Functional diagram

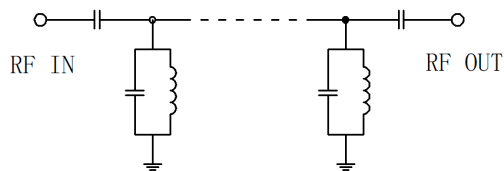

Typical test curve

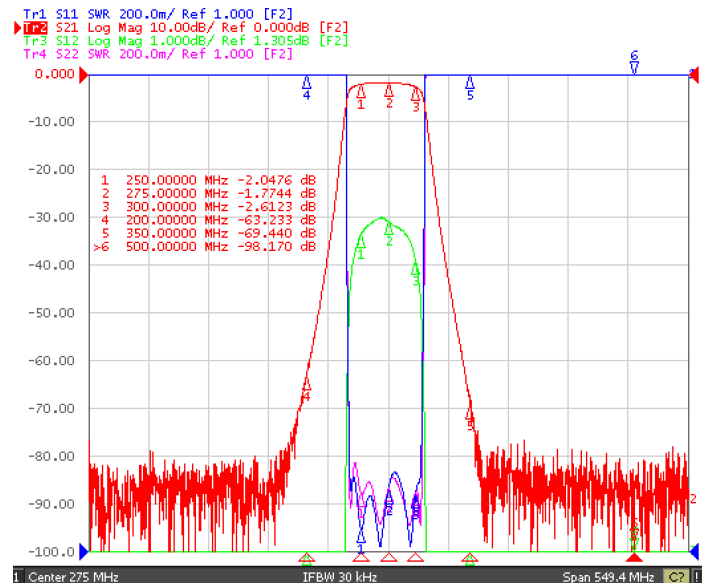

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.