


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.8	~	2	GHz
Attenuation range	1	~	63	dB
IL			1.1	dB
VSWR		1.5		
Attenuation accuracy root mean square		3		dB

Other parameters

step	1dB
Power Capacity	0.2W
Impedance	50Ω
Connector	SMA-K detachable, Pin 0.38mm
Connector material	Stainless steel
Working voltage	+15V
Working current	≤150mA
Operation Temp.	-40~+70°C Design assurance
Other	供电控制接头为DB9, 6位TTL控制

Configuration(mm)

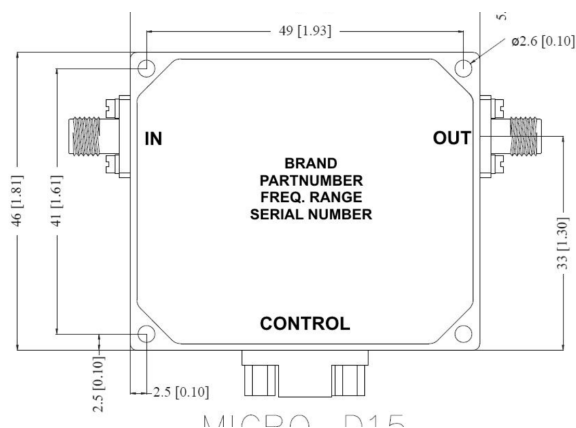

Note

1. Clean the surface of the product, do not soak the product in a cleaning solution;
2. This product belongs to electrostatic sensitive devices. Pay attention to anti-static measures during installation or storage;
3. If the overall temperature is greater than 125 °C, please consult with us before placing an order.