


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	12	~	22	GHz
Passband IL	/	/			1.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-10	GHz $\geq$	70			dBc
Rejection	11	GHz $\geq$	40			dBc
Rejection	23	GHz $\geq$	40			dBc
Rejection	24-36	GHz $\geq$	70			dBc
Passband VSWR	/	/			1.80	

Reference picture




Configuration(mm)

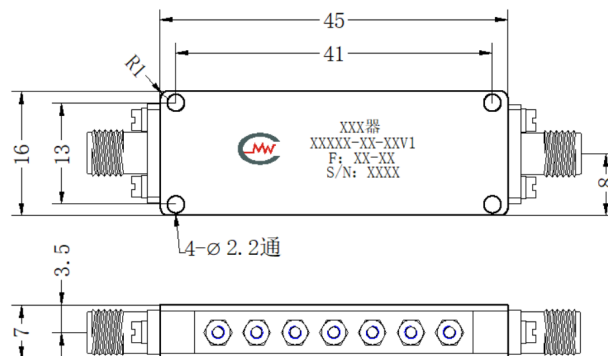

Other parameters

Connector	SMA-F Detachable, Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Typical test curve

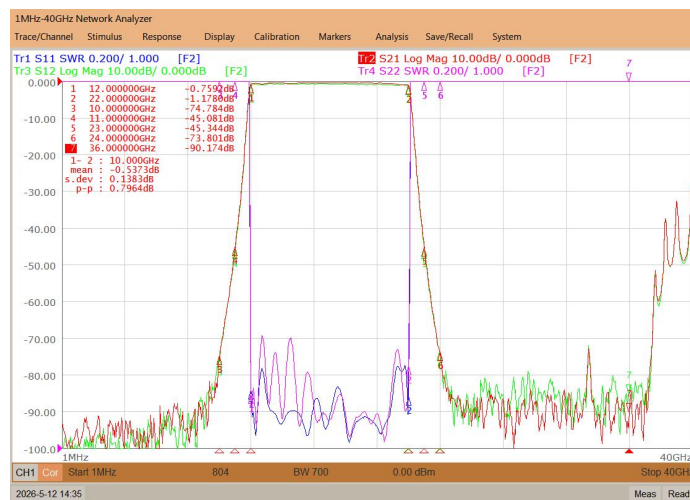

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.