


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	12.25	~	12.75	GHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.6	dB
Rejection	DC-11	GHz $\geq$	65			dBc
Rejection	14-18	GHz $\geq$	65			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K detachable
Impedance	50 Ω
Surface	Silver plating
Power	10W
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

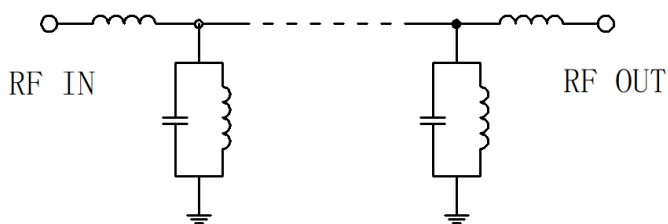


Reference picture



Configuration(mm)

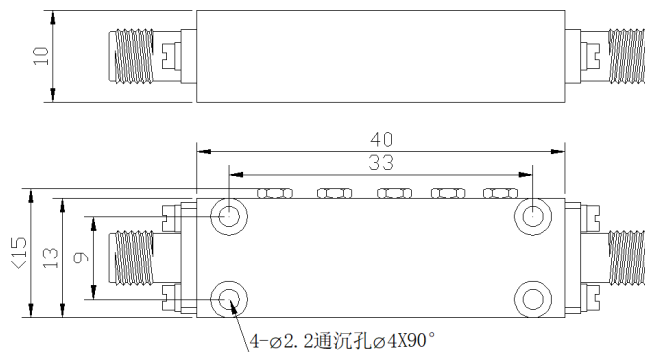

Typical test curve

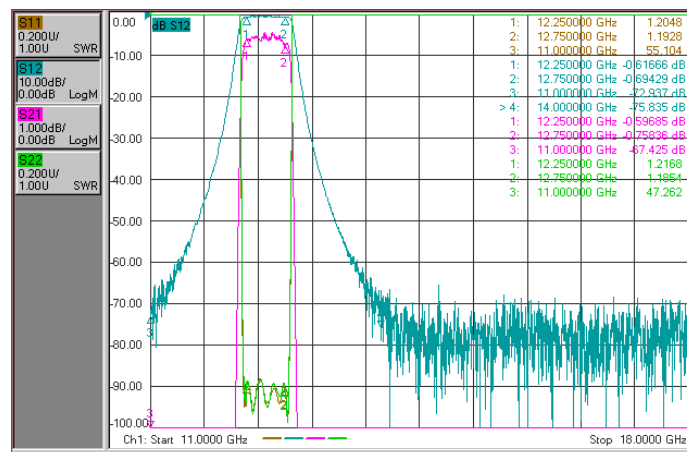

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- If the temperature is higher than 125°C, consult with us before ordering.