


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	700	~	960	MHz
Passband F2	/	/	1700	~	2170	MHz
Passband F3	/	/	2500	~	2690	MHz
Passband F4	/	/	3300	~	4200	MHz
Ripple			12			
Passband IL					3.0	dB
Rejection	30-450	MHz $\geq$	10			dB
Rejection	1075-1105	MHz $\geq$	30			dB
Rejection	1105-1600	MHz $\geq$	20			dB
Rejection	1600-1650	MHz $\geq$	10			dB
Rejection	2240-2400	MHz $\geq$	20			dB
Rejection	2400-2450	MHz $\geq$	10			dB
Rejection	2770-3200	MHz $\geq$	20			dB
			25			dBc

Configuration(mm)

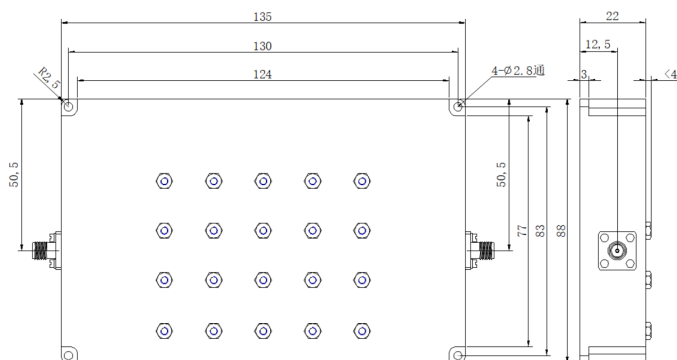

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-F or K
Connector material	Stainless steel
Impedance	50Ω
Surface	Black baking paint
Power Capacity	5W Design assurance
Shell Material	Aluminium
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.