

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/		13		GHz
Passband IL	/	/			1.4	dB
Rejection	12	GHz $\geq$	65			dB
Rejection	14	GHz $\geq$	65			dB
Passband VSWR	/	/			1.3	


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

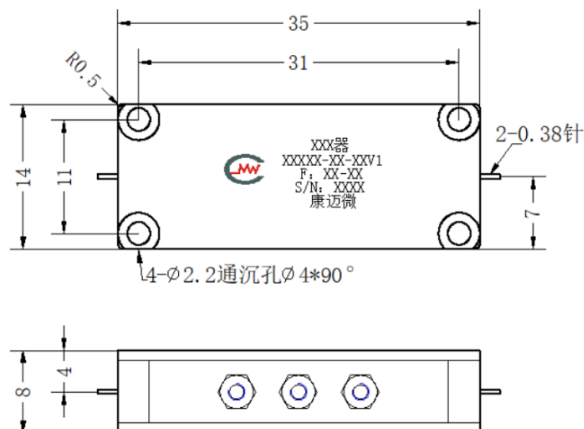

Typical test curve



Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /