

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/		4200		MHz
Passband IL	/	/			4.5	dB
Rejection	DC-4	GHz $\geq$	72			dBc
Rejection	4-4.1	GHz $\geq$	40			dBc
Rejection	4.3-4.4	GHz $\geq$	40			dBc
Rejection	4.4-12	GHz $\geq$	75			dB
Passband VSWR	/	/			1.50	


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

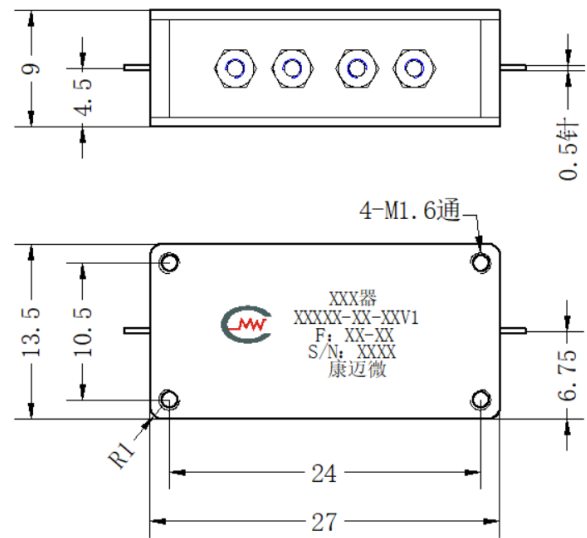

Typical test curve

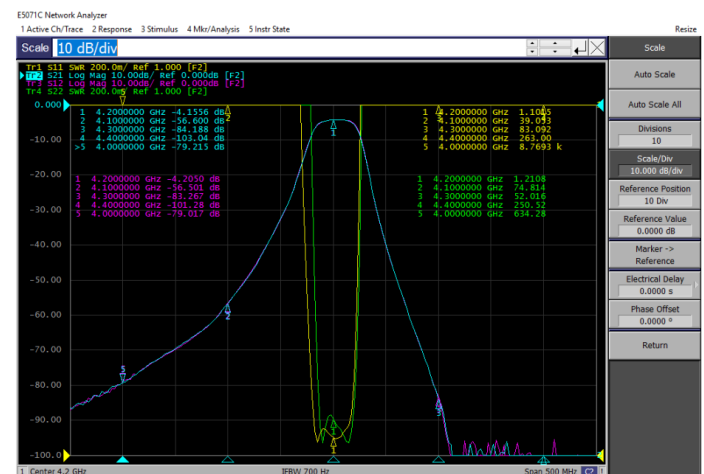

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.