


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2300	~	2400	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			1	dB
Rejection	DC-2280	MHz $\geq$	60			dB
Rejection	2420-6000	MHz $\geq$	60			dB
Passband VSWR	/	/			1.5	

Reference picture




Configuration(mm)

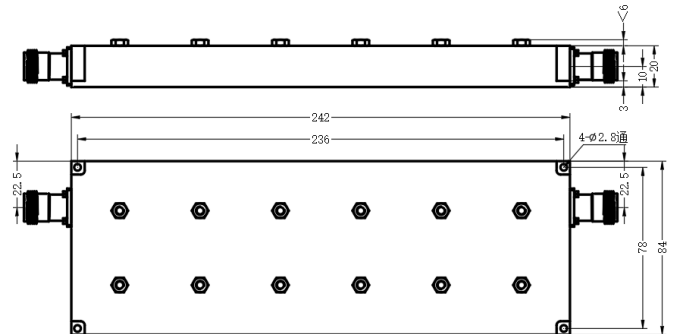


Other parameters

Connector	N-F or K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Black
Power Capacity	200W
Product shell material	Aluminium
Delay ripple	$\leq$ 60ns
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Typical test curve

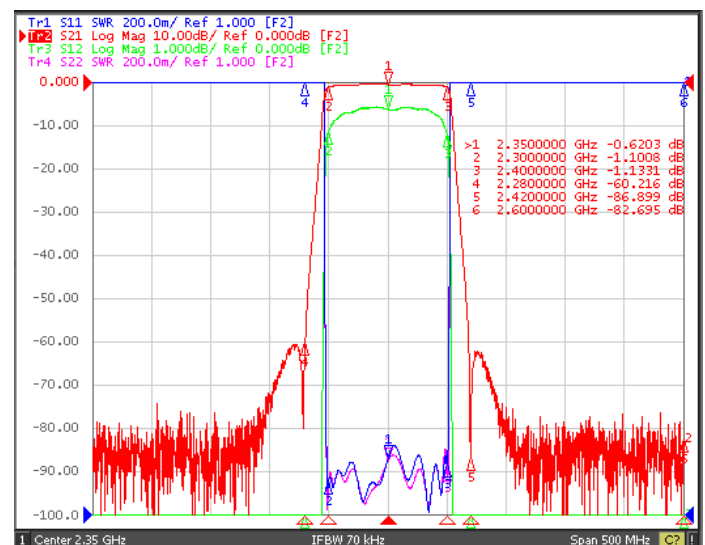


Functional diagram

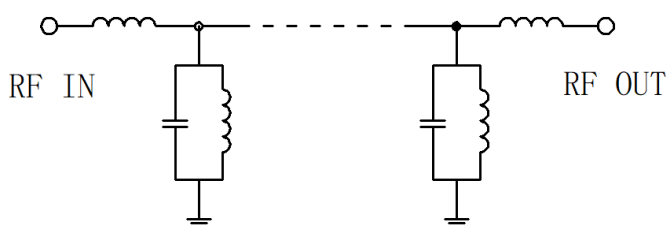

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.

Typical test curve

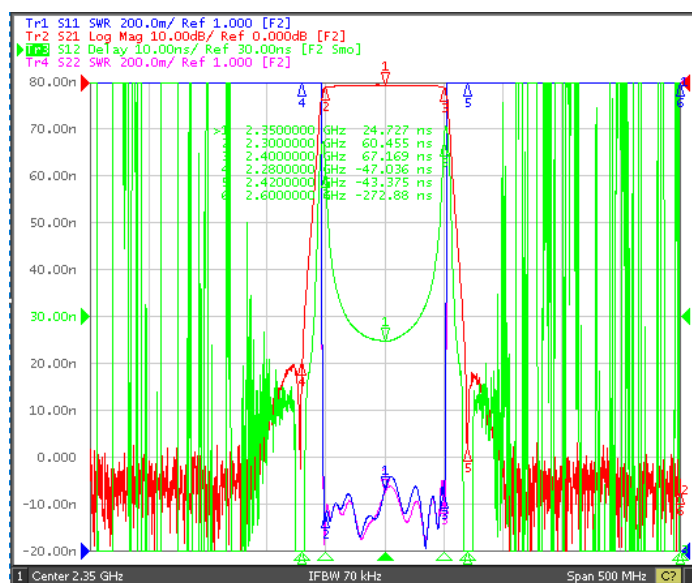

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.