


Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		1258	~	1278	MHz
Stopband Rej.	$\geq$	25			dB
Passband		DC	~	1246	MHz
Passband		1298	~	1600	MHz
Passband IL				1.0	dB
Passband VSWR				1.8	


Other parameters

Connector	SSMA-MF0.38mm针
Connector material	Stainless steel
Impedance	50 Ω
Surface	Conductive oxidation
Power Capacity	15W Design assurance
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Functional diagram

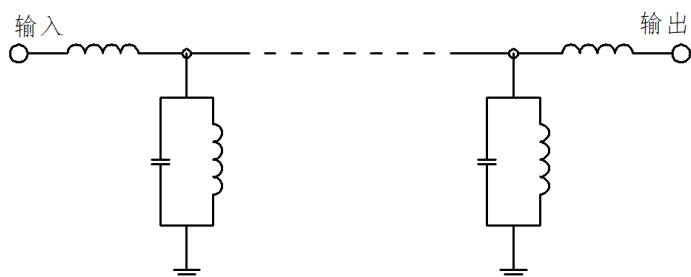

Configuration(mm)

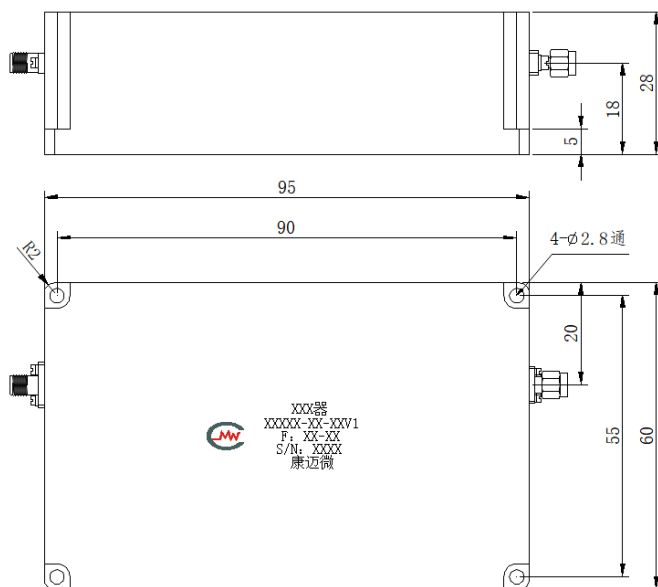

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.