


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5570	~	5650	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			0.5	dB
Rejection	DC-4.5	GHz	$\geq$ 70			dB
Rejection	5470	MHz	$\geq$ 40			dB
Rejection	5750	MHz	$\geq$ 40			dB
Rejection	7.0-10	GHz	$\geq$ 70			dB
Passband VSWR	/	/			1.40	

Reference picture




Configuration(mm)

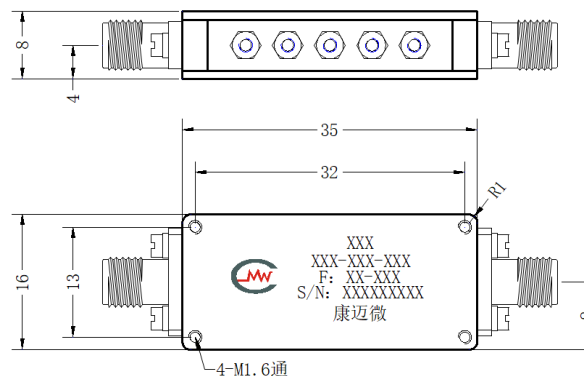

Other parameters

Connector	SMA-F detachable Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Typical test curve

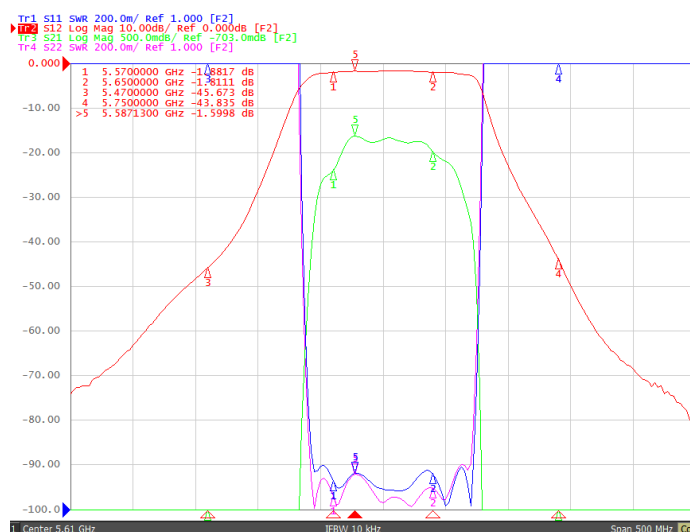

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /