


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	950	~	2150	MHz
IL			2.5	dB
Amplitude equalization			2.0dB±0.1	dB
Return loss	6			dB

Other parameters

Power Capacity	2W Design assurance
Impedance	50Ω
Connector	Pin 0.5mm
Surface	silver-plate
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-40~+70°C Design assurance
Other	The equilibrium type is a "-" slope type (loss decreases with increasing frequency)

Configuration(mm)

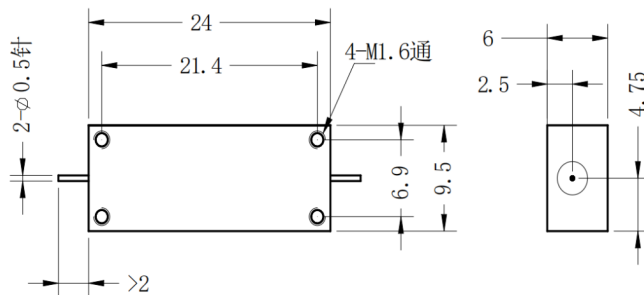

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.