


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1790	~	3000	MHz
Passband IL	/	/			1.5	dB
Rejection	DC-1575.42	MHz $\geq$	90			dB
Passband VSWR	/	/			1.8	


Configuration(mm)

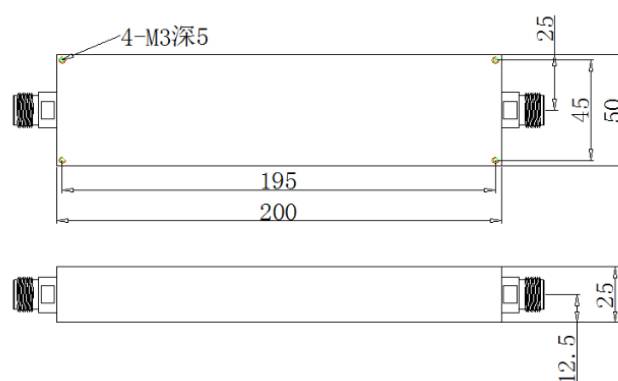

Other parameters

Connector	N -F
Connector material	Shell copper plated with ternary alloy
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	100W Design assurance
Operation Temp.	-20~+60°C Design assurance

Typical test curve

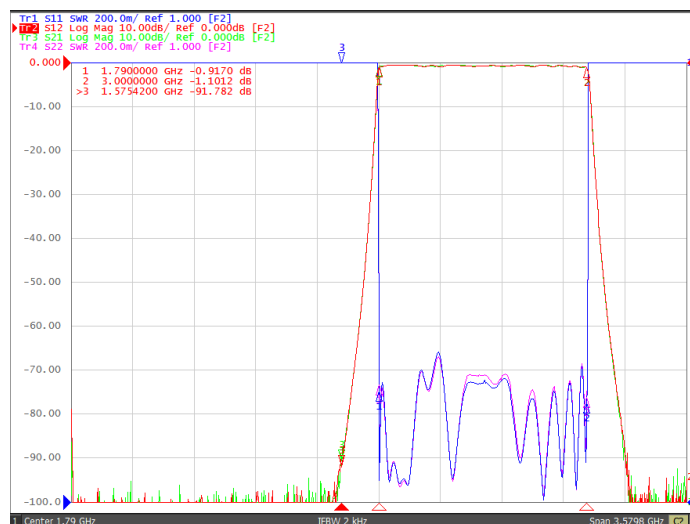

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.